

Read User Guide and Safety guide before starting your project. These instructions must be followed for the product to work successfully and safely. First time users are encouraged to visit our website www.ecobust.ca and contact their local dealer.

1 drill




1. Ensure you have your safety glasses, gloves, dust mask and equipment in place first.
2. Drill holes using a core drill, rock drill or substitute using 1.50" diameter drill bit.
3. The hole diameter drilled should be 1.50".
4. Holes to be drilled 8 to 16 inches apart. For harder rock and reinforced concrete, hole spacing should be 8 inches apart.
5. Drill between 80 to 90% of the depth
6. Ecobust must have free space to expand into. Create a series of empty holes if required.
7. For specific drill patterns refer to website or call your local dealer and refer to Drill Guide.

2 mix



1. Select the correct product type for your specific temperature range. Refer to chart below.

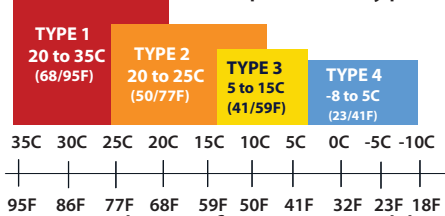

** Ensure correct Product Type used for maximum performance.*

2. Pour 1.5 liters of common cold water in a bucket and gradually add one bag (5Kg) of product. Do not mix more than 2 bags (10Kg) at a time.
3. Mix well, using a mixing paddle, until the powder is completely dissolved in water into a slurry.

3 pour



1. After drilling minimize water and residue left behind in the holes.
2. Within 10 minutes of mixing, pour the product into the holes, filling within 1 inch from the top.
3. Gradually pour the mixture into the holes to ensure no air gaps are trapped within. Poke a stick or rod down the hole if necessary.
4. Be sure to empty the bucket, do not leave surplus mixture.
5. Cover the holes with a tarp after they have been filled. Do not look into the holes.
6. Keep product away from direct sunlight.
7. For best results allow product to set for 24 hrs (product continues to expand up to 48 hrs).

PRECAUTION

1. Choose and use the correct Product Type, to ensure no blow outs and successful results.
2. Before starting any job always wear safety glasses, dust mask, and rubber gloves.
3. Do not look into filled holes over stand over them at any time, if blow outs occur may cause injury.
4. Do not leave excess product in the bucket.
5. Cover holes with a tarp to avoid direct sunlight.
6. When mixing, if the product begins to steam in the bucket, add some water to dilute it.
7. Avoid contact with eyes and skin.
8. Store in cool, dry place.

Environmentally Friendly Non Explosive
No Noise or Vibrations No Flying Rocks